

DTR 600

Digital Tape Repeater


Moment to moment, the DTR 600 gives an accurate account of the vessel's movement. It's matrix LED design ensures easy viewing from all directions and heights. Adjustable illumination allows for viewing at full night to daylight bridge conditions. The DTR 600 is lightweight and can be installed in a wide range of locations. It is the #1 choice for steering repeater and heading display applications.




Sperry Marine

Product Information

BULKHEAD MOUNT

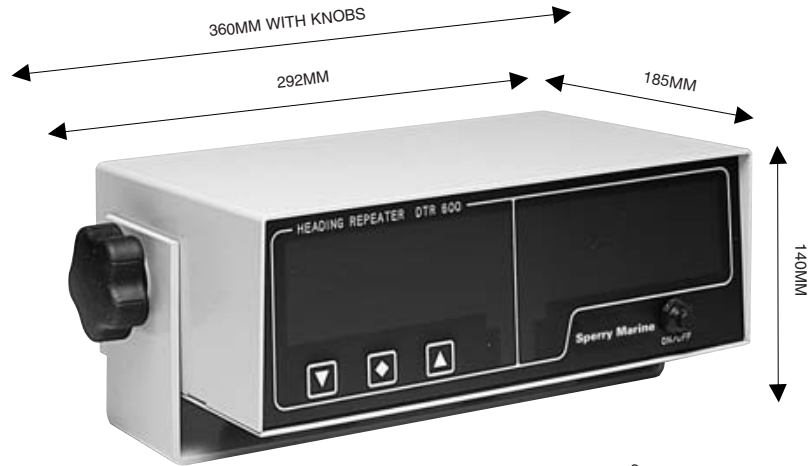

PANEL MOUNT

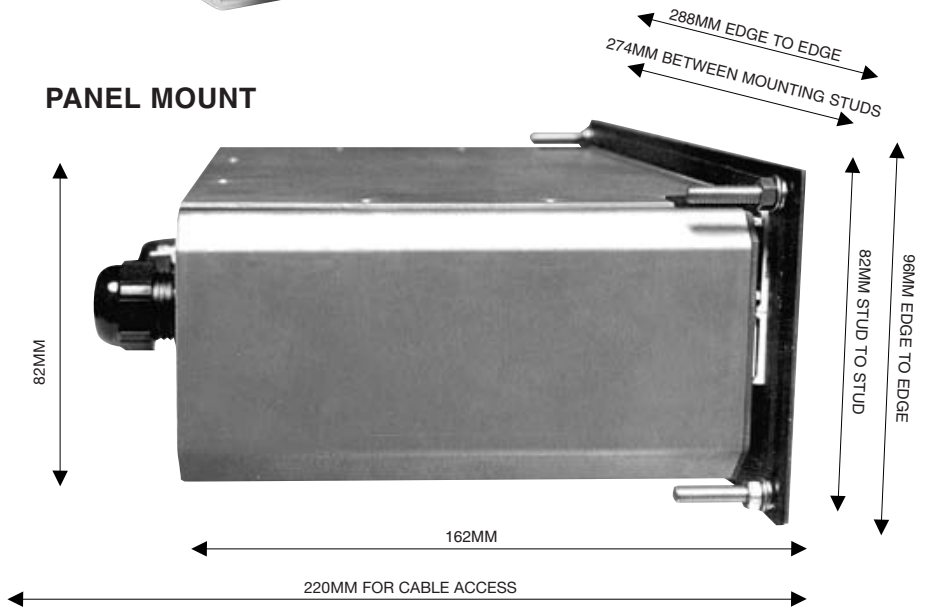

Sperry Marine

www.sperrymarine.northropgrumman.com

For more information, please contact:

AMERICAS

Charlottesville, VA USA

Tel: +1 434-974-2000

Fax: +1 434-974-2259

Melville, NY USA

Tel: +1 631-719-4736

Fax: +1 631-719-4630

ASIA

China, Shanghai

Tel: +86-21-5836-9978

Fax: +86-21-5836-9979

Hong Kong, Sheung Wan

Tel: +852-2581-9122

Fax: +852-2581-9967

Japan, Tokyo

Ph: +81 (0)-3-3863-7401

Fax: +81 (0)-3-3863-7455

Singapore

Tel: +65-6274-3332

Fax: +65-6271-3339

South Korea, Busan

Tel: +82-51-247-7455

Fax: +82-51-247-7454

Taiwan, Kaohsiung

Tel: +886-7-331-7786

Fax: +886-7-331-7924

CANADA

Nova Scotia, Halifax

Tel: +1 902-468-9479

Fax: +1 902-468-9480

EUROPE

Belgium, Antwerp

Tel: +32-3-233-14-33

Fax: +32-3-225-05-53

Denmark, Copenhagen

Tel: +45-77-33-66-33

Fax: +45-77-33-66-11

Germany, Hamburg

Tel: +49 (0)40 299 00-0

Fax: +49 (0)40 299 00-146

Holland, Vlaardingen

Tel: +31(0)-10-4451600

Fax: +31(0)-10-4345015

Norway, Bergen

Tel: +47-55-94-94-94

Fax: +47-55-34-52-27

United Kingdom, New Malden

Tel: +44(0)20 8329 2000

Fax: +44(0)20 8329 2415

Features

- Large Clear Display
- Simulated Endless Tape
- Panel Mounting Anywhere
- Step by Step and Serial Interfaces
- Self Aligning in Serial Input Mode
- Shows Increments of Heading In 1/6th Degree Steps.

Power

- 115/230 VAC, 1 phase 50/60 HZ, 100 Va

Serial Data Input

- RS232 or RS422 NMEA 0183 \$HDT MESSAGE, 1 start,
- 8 data, 1 stop, no parity data bit character format, 4800 Baud

Step Data

- 20 - 90 VDC input

Output

- RS232 & RS422 \$HDT MESSAGE

Display Type

- LED matrix array
- Scrolling character height - 28 mm
- 32 Degrees of heading displayed

Environmental

- Meets or exceeds IEC 945 standards

ISO 8728 Approvals

- DOT & RINa

Weight

- 1.4 Kg

Bulkhead Kit Part: #1813545

Sperry Marine, with worldwide headquarters in Charlottesville, VA, and major engineering and support offices in Melville, NY, New Malden, England, and Hamburg, Germany, is part of the Northrop Grumman **Electronic Systems** sector.

This brochure, including the information contained herein, is the Intellectual Property of Northrop Grumman Corporation and as such may not be copied or reproduced without the written permission of Northrop Grumman. All specifications herein were in effect on the date of this publication. However, any technical data should not be solely relied upon and should be verified at time of order. Furthermore, equipment may vary from that specified due to the Sperry Marine policy of continual product improvement.